


# CS-760B / CS-760W

## 2-Way Weatherproof Music Horn

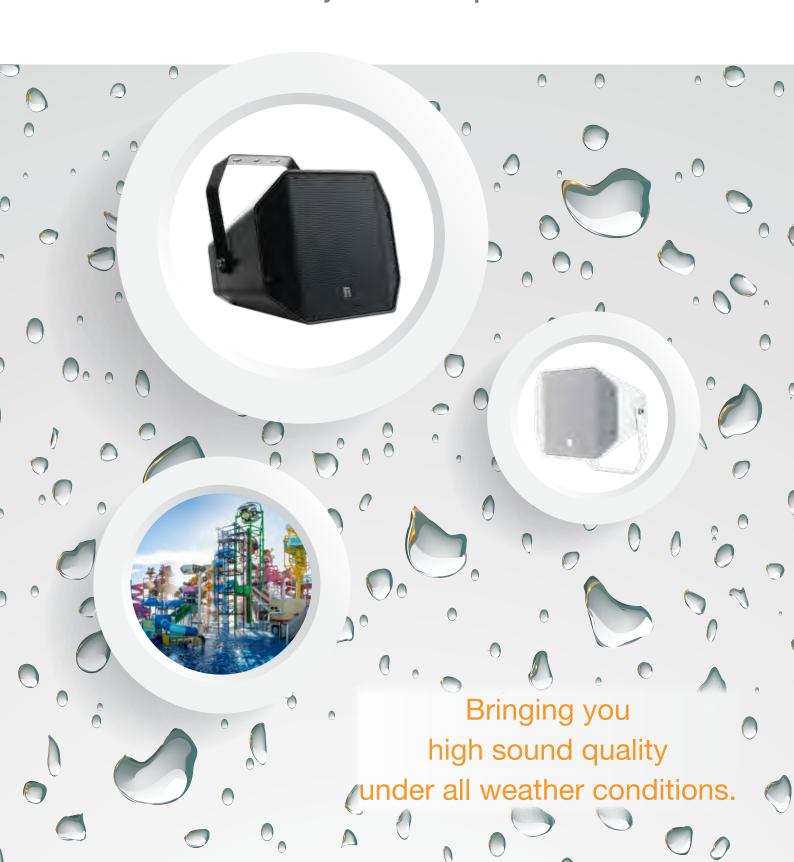

The horn speaker that fits all your need for excellent speech and BGM clarity in the open...

### CS-760B / CS-760W

#### 2-Way Weatherproof Music Horn

- Highly intelligible: suited to voice alarm, public address and BGM application by 2-way speaker system.
- IP66 certified: All weather durability, be it water or dust. Ideal for any fully outdoor applications.
- Special paint coat prevents color degradation, ensuring long-lasting exterior condition.
- Rotary switch facilitates hassle-free impedance change.
- Various mounting brackets available as accessories allowing flexibility of mounting the speaker on a platform, in the ceiling, on the wall or on a pole.

#### APPLICATION EXAMPLES

81





Parking spaces

Railway stations





Amusement parks

Sports fields

#### **SPECIFICATIONS**

	CS-760B CS-760W		
Rated Input	60 W (high impedance)		
Rated Impedance	100V Line: 170 Ω (60 W), 330 Ω (30 W), 670 Ω (15 W), 1.3 kΩ (7.5 W) 70V Line: 83 Ω (60 W), 170 Ω (30 W), 330 Ω (15 W), 670 Ω (7.5 W)		
Sensitivity (1 W, 1 m)	100 dB		
Maximum SPL (60W, 1 m)	117 dB		
Frequency Response	100 - 20 kHz		
Crossover Frequency	2.5 kHz		
Directivity Angle	Horizontal: 90°; Vertical: 80°		
Speaker Component	Low Frequency: 16 cm (6") cone-type High Frequency: 2.5 cm (1") dome tweeter		
Dust/Water Protection	IP66		
Connection	Speaker cord (Hot: Black; Com: White)		
Finish	Enclosure: ABS, Black, Paint Coating Punched Net: Surface-treated Steel Plate, Black, F Bracket: Stainless Steel, Black, Powder Coating	Paint Coating	Enclosure: ABS, White, Paint Coating Punched Net: Surface-treated Steel Plate, White, Paint Coating Bracket: Stainless Steel, White, Powder Coating
Dimensions (W x H x D)	388 x 310 x 367 mm		
Weight	7.4kg		



