



# NF-2

## Window Intercom System

(Two-way Talk Enhancement System)

Ensure your voice is clearly heard through the counter shield





**With NF-2, there is no need to speak loudly through the counter shield anymore!**

**Compact & Lightweight**  
 The communication station can be installed in small spaces which is out of reach to other bulky or heavy communication equipment.




**Instant Installation**  
 Simple wiring and mounting process makes it suitable for even temporarily booth setups and/or relocations.

A magnet is pre-mounted on the backside of the station for tool-free quick installation back to back. The optional magnetic plates with a double-sided tape are also included for more flexible installation



**Sophisticated Audio Control**  
 Boosting higher frequencies to compensate intelligibility lost with the use of partitions. Higher frequencies also ensures lesser sound spread

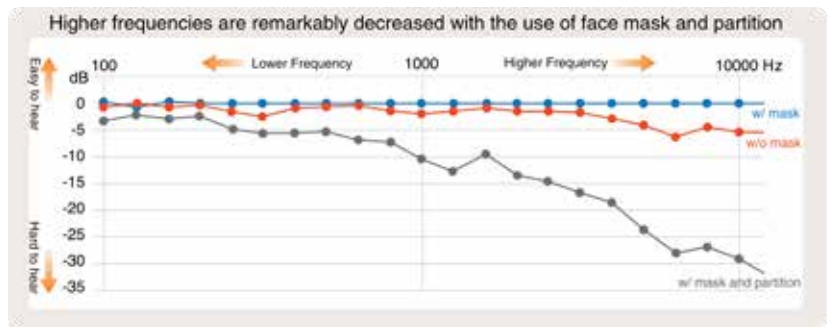

**Product Information**

**Mic/Speaker Unit:**  
 Dimensions (WxHxD) : 60 x 60 x 20 mm  
 Weight : Approximately 50g (per unit)  
 Mounting method : Magnet mount

**Control Unit:**  
 Dimensions (WxHxD) : 127 x 30 x 141 mm  
 Weight : Approximately 225g  
 Power Source : 9V DC (optional AD-0910)

Optional Accessory : Extension Cable 5m (YR-NF5)



TOA Electronics Pte Ltd  
 www.toa.com.sg  
 facebook.com/TOAasiapacific  
 Specifications are subject to change without notice.  
 Printed in Singapore (65) 865-0821-01A