


DESCRIPTION

The DH-502-AS features a long horn which permits sounds to easily pass through and is ideal for providing public address information. It is designed to be used in conjunction with 2 driver units, and has an internal bird protector net to prevent insects and birds from getting into the unit.

SPECIFICATIONS

Applicable Drivers	TU-631 (M), TU-632 (M), TU-651 (M), TU-652 (M), TU-660 (M)
Sound Pressure Level	110 dB (1 W, 1 m) (when operated with drivers)
Frequency Response	200 Hz - 6 kHz (when the TU-631 (M) or TU-632 (M) or TU-651 (M) or TU-652 (M) unit is used) 200 Hz - 8 kHz (when the TU-660 (M) unit is used)
Driver Coupling Adapter	1 - 3/8 18 threads (inch screw)
Variable Installation Angle	Hor. : +15°, -15° ; Ver. : +15°, -15° (when locally procured mounting bracket is used)
IP rating	IP65 for Drivers (when be installed to Horn)
Finish	Bell, Horn B and Y-Shaped Adapter : Aluminum, Grey, Powder coating Mounting Bracket : Stainless Steel, Natural
Dimensions	ø500 X 846 (D) mm (ø19.69" X 33.31")
Weight	5.7 kg (12.57 lb)
Accessory	BH Screw M5x25 SUS 3-SEM ...4 pcs, Rubber Gasket ...1 pcs

APPEARANCE

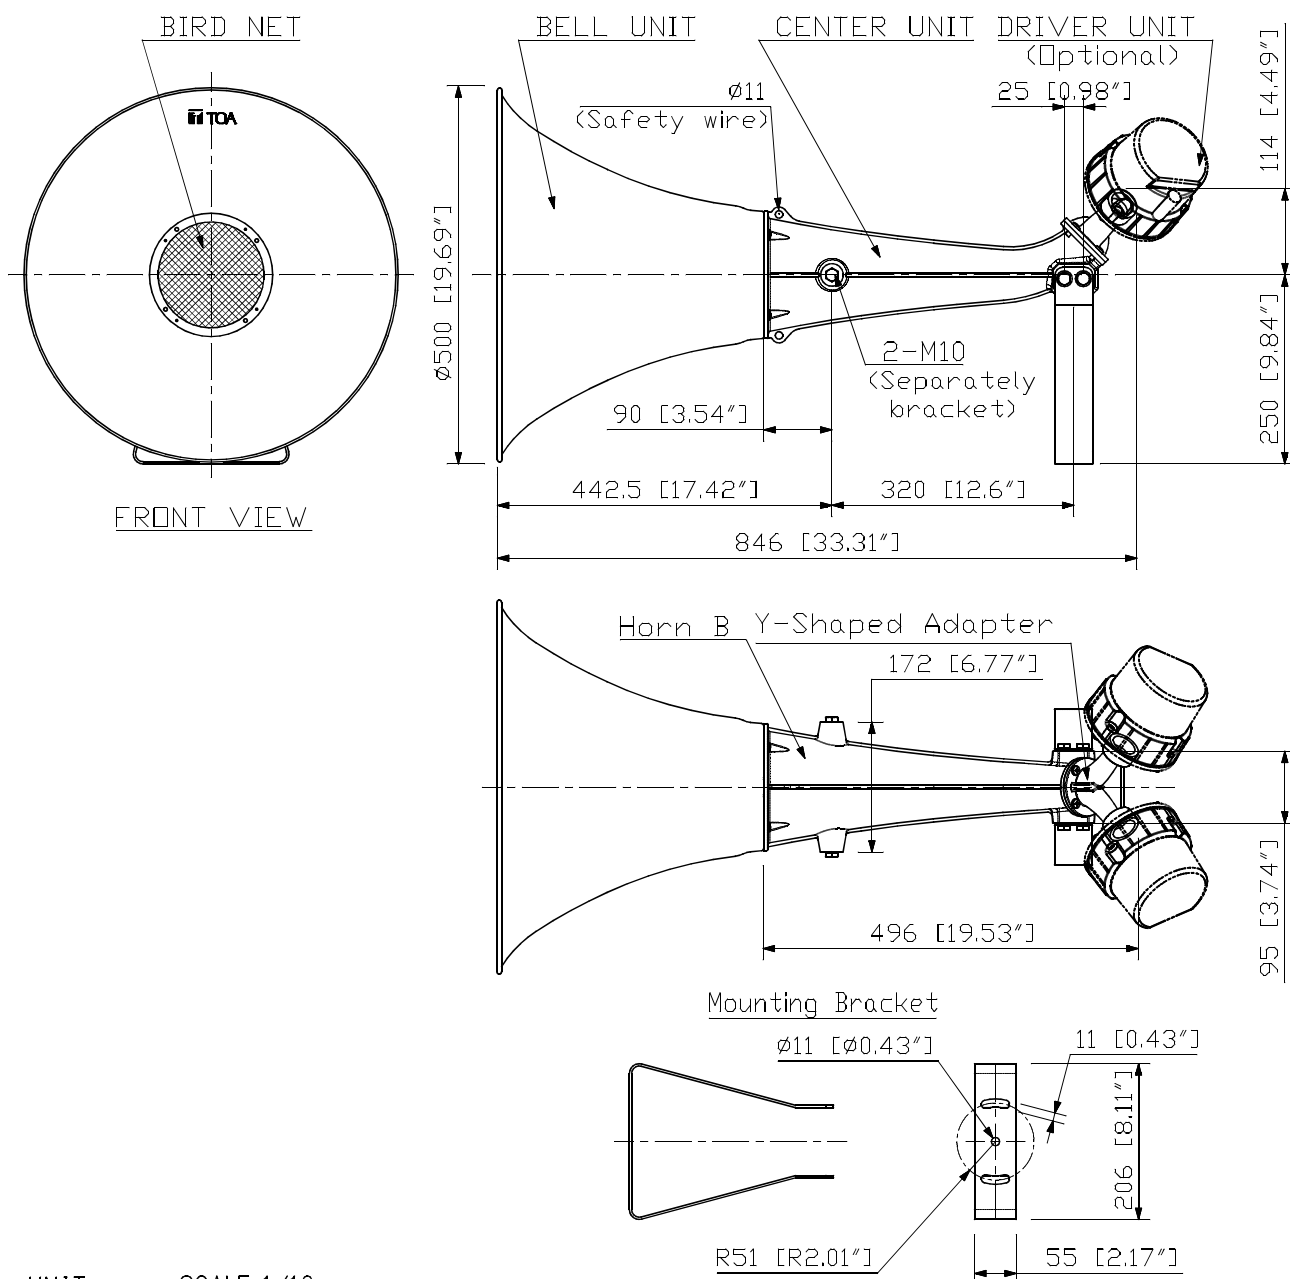

UNIT:mm SCALE: 1/10