


■DESCRIPTION

The TS-811 is a Chairman unit that can be connected to the conference system by a cable. It is equipped with a priority switch, allowing speech to take precedence over the Delegate unit. The TS-811 is directly connected to the TS-919B1 or TS-919B4 Bridge unit, then to the TS-910 Central unit via the TS-918 Expansion unit. Either the standard type or long type can be selected for the microphone.

■SPECIFICATIONS

|                       |   |
|-----------------------|---|
| Power Source          | 24 V DC (supplied from the TS-918 Expansion Unit (option))  |
| Current Consumption   | Max. 60 mA  |
| Modulation Method     | Frequency modulation  |
| Carrier Frequency     | Transmission: Audio channel 1: 7.35 MHz<br>Audio channel 2: 8.10 MHz<br>Audio channel 3: 8.55 MHz<br>Audio channel 4: 9.15 MHz<br>Control channel: 6.45 MHz<br>Reception: Audio channel: 1.95 MHz |
| Input                 | Microphone terminal: XLR-4-31 type<br>(dedicated for connecting the optional TS-903 or TS-904)  |
| Output                | Monitor speaker: 8 Ω, 0.2 W<br>Headphone: Ø3.5 mm mini Jack (3P:monaural) × 2   |
| Connection Terminal   | RJ45 connector  |
| LED Indicator         | Speech indicator (flashes at communication failure),<br>Power indicator (flashes at communication failure)  |
| Function              | Monitor volume control, Headphone volume control, Priority speech function  |
| Operating Temperature | 0 °C to +40 °C (32 °F to 104 °F)  |
| Operating Humidity    | 90 %RH or less (no condensation)  |
| Finish                | Top panel: ABS resin, gray metallic, paint, semi-gloss  |
| Dimensions            | 210 (W) × 68.6 (H) × 152 (D) mm (8.27" × 2.7" × 5.98")  |
| Weight                | 560 g (1.23 lb)   |
| Option                | Microphone: TS-903, TS-904 (Select either one.)   |

■APPEARANCE

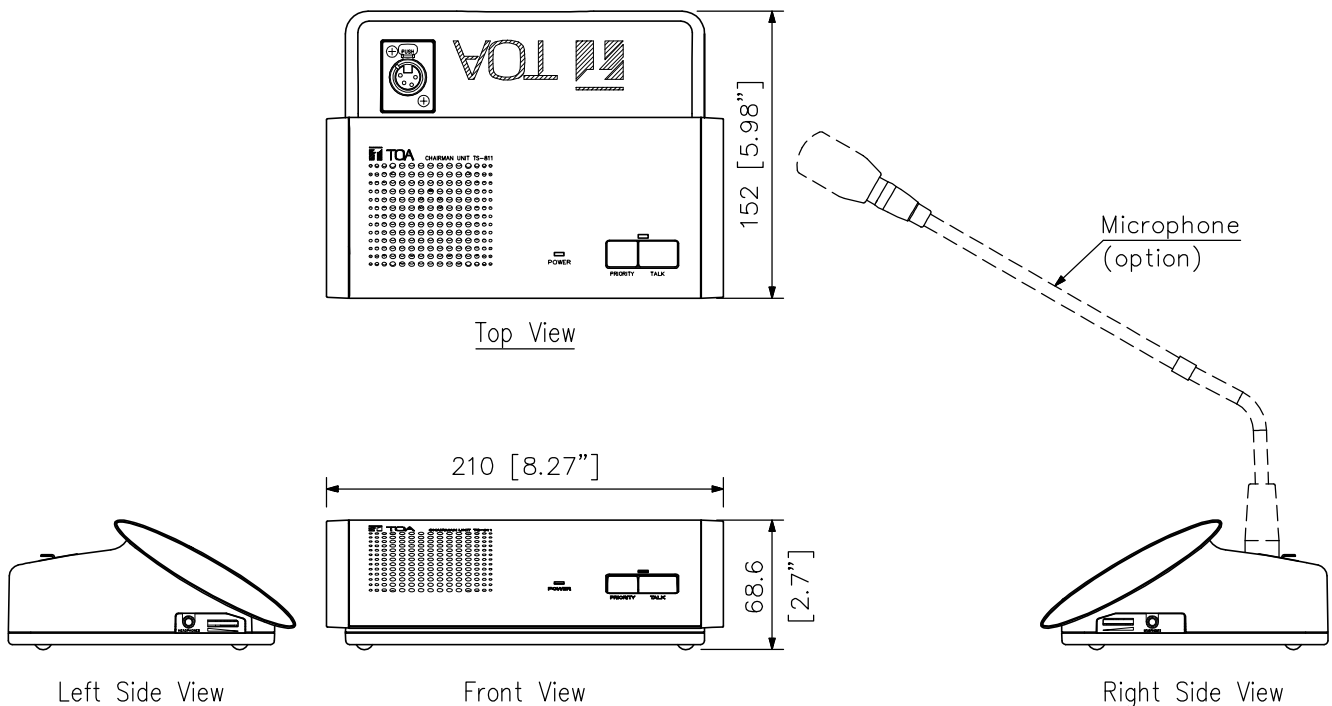

UNIT:mm SCALE:1/4