


■DESCRIPTION

The TS-919B4 is a Bridge unit for connecting four Wired Conference units of the TS-811, TS-911, TS-812, or TS-912.  
It connects to the conference unit with a Category 5 cable.


■SPECIFICATIONS

Power Source	24 V DC (supplied from the TS-918 Expansion Unit (option))
Current Consumption	Max. 26 mA
Branching loss	Upstream: 17.5 dB Downstream: 16.5 dB
Insertion loss	Upstream: 3 dB Downstream: 2 dB
Connection Terminal	Communication cable connection terminal: RJ45 connector × 2 Conference unit connection terminal: RJ45 connector × 4
LED Indicator	Connection status indicator × 4
Number of Connectable Chairman/Delegate Units	4 units
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	ABS resin, black
Dimensions	176.2 (W) × 75 (H) × 29.8 (D) mm (6.94" × 2.95" × 1.17")
Weight	160 g (0.35 lb)


■APPEARANCE

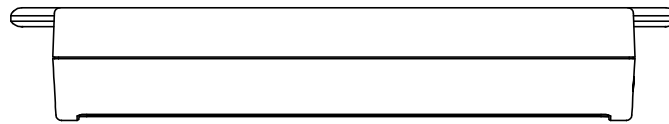


Top View




Left Side View

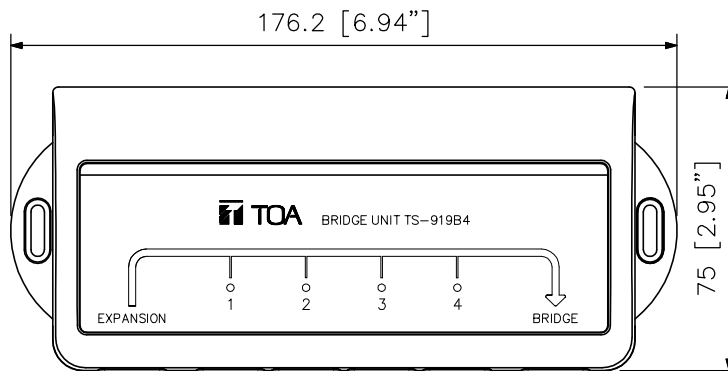

Front View

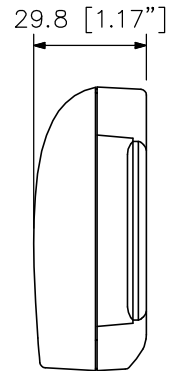

Right Side View

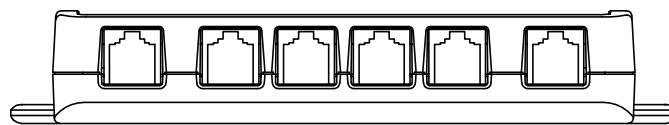

Bottom View

UNIT:mm SCALE:1/2