


■DESCRIPTION

The TS-924 Microphone is a dedicated component of the Infrared Conference System's Chairman unit and Delegate unit. Its mic head is equipped with an illuminated display ring that allows the status of the units in use to be monitored at a glance. The microphone have two flexible parts, making it possible to adjust the microphone to an optimal position for the user.

■SPECIFICATIONS

Type	Electret condenser microphone
Directivity	Unidirectional
Rated Impedance	1.4 kΩ
Rated Sensitivity	-37 dB (1 kHz 0 dB = 1 V/Pa)
LED Indicator	Speech indicator (ring type) Red
Frequency Response	100 Hz - 13 kHz
Output Connector	Combined type of XLR-4-12C
Flexible Part	2 parts
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Body: Aluminum, black, semi-gloss, paint Shaft: Copper alloy, black, semi-gloss, paint
Length	620 mm (2.03 ft)
Weight	150 g (0.33 lb)
Applicable Unit	Chairman unit: TS-821, TS-921, TS-811, TS-911 Delegate unit: TS-822, TS-922, TS-812, TS-912

■APPEARANCE

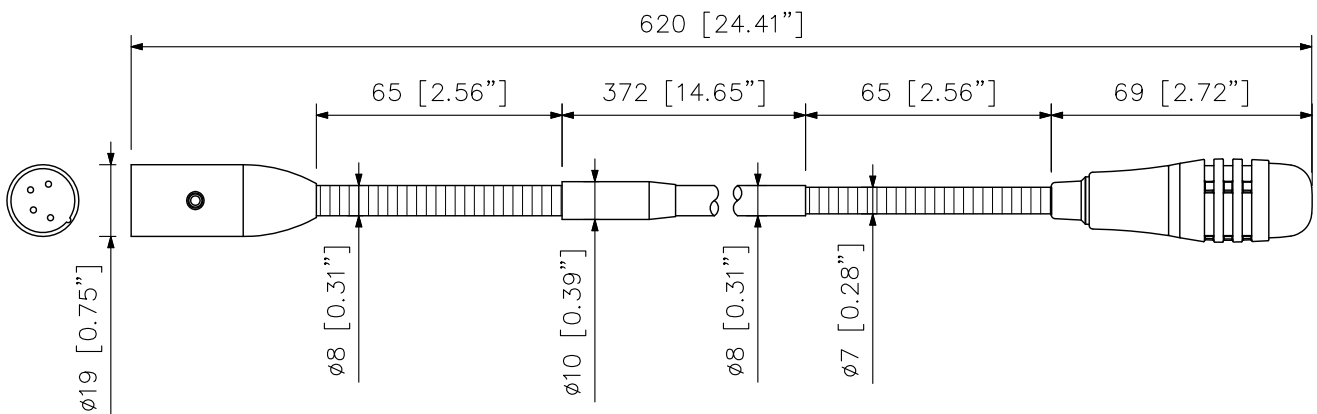

UNIT: mm SCALE: 1/2